peerless-AV

Installation and Assembly:
Accessory Plate for VESA® 200 mm x 200 mm Pattern

Model: ACC450

Note: Read entire instruction sheet before you start installation and assembly.

For customer care call (800) 865-2112.

⚠ WARNING

- Do not begin to install your Peerless product until you have read and understood the instructions and warnings contained in this Installation Sheet. If you have any questions regarding any of the instructions or warnings, please call Peerless customer care at 1-800-865-2112.
- This product should only be installed by a qualified professional.
- Make sure that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- Never exceed the Maximum Load Capacity of 150 lb (68 kg).
- Always use an assistant or mechanical lifting equipment to safely lift and position equipment.
- Tighten screws firmly, but do not overtighten. Overtightening can damage the items, greatly reducing their holding power.

Before you begin, make sure all parts shown are included with your product.

Parts List

	Description	Qty	Part #
A	adapter plate	1	095-1721
B	M6 x 12 mm phillips screw	4	520-1128
C	M6 x 12 mm serrated washer head socket pin screw	4	510-1050
D	M6 x 20 mm phillips screw	4	520-9402
E	M6 x 20 mm serrated washer head socket pin screw	4	510-9554
F	M8 x 10 mm phillips screw	4	520-1605
G	M8 x 10 mm serrated washer head socket pin screw	4	520-1706
H	M5 x 6 mm phillips screw	4	520-1023
I	M5 x 6 mm serrated washer head socket pin screw	4	520-1114
J	4 mm security allen wrench	1	560-9646

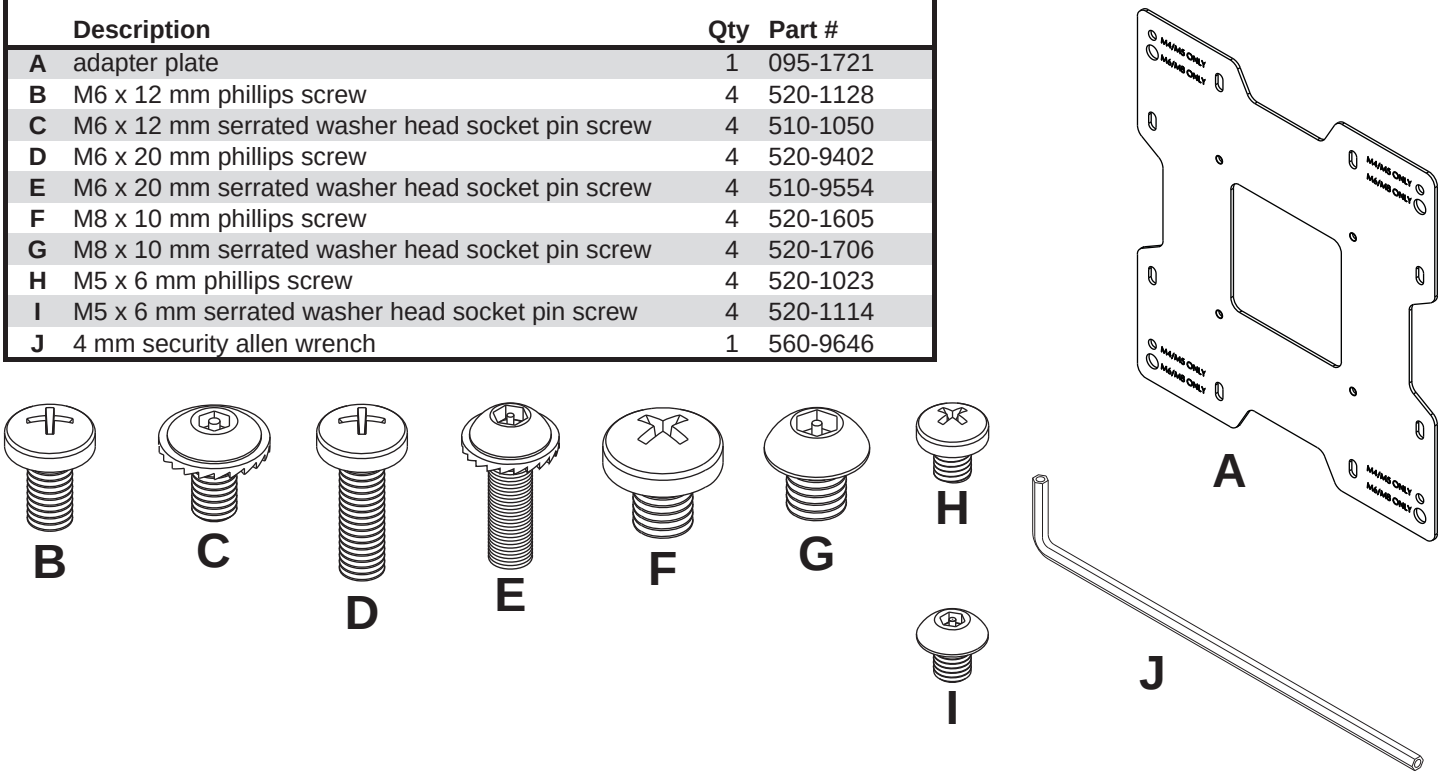

ISSUED: 10-13-05 SHEET #: 202-9039-2 08-16-11

Attaching Adapter Plate to Display with VESA 200 x 200 Mounting Pattern

⚠ WARNING

- If screws don't get three complete turns in the display inserts or if screws bottom out and adapter plate is still not tightly secured, damage may occur to display or product may fail.

1 Choose hole pattern as shown. Attach adapter plate (**A**) to back of display using four M6 x 12 mm screws (**B**) or M8 x 10 mm screws (**F**).

Notes:

- If screw (**B**) gets less than three threads of engagement, attach adapter plate (**A**) to back of display using four M6 x 20 mm screws (**D**).
- For security option, use M6 x 12 mm screws (**C**) in place of (**B**), M6 x 20 mm screws (**E**) in place of (**D**), and M8 x 10 mm screws (**G**) in place of (**F**). Tighten security screws using allen wrench (**J**).

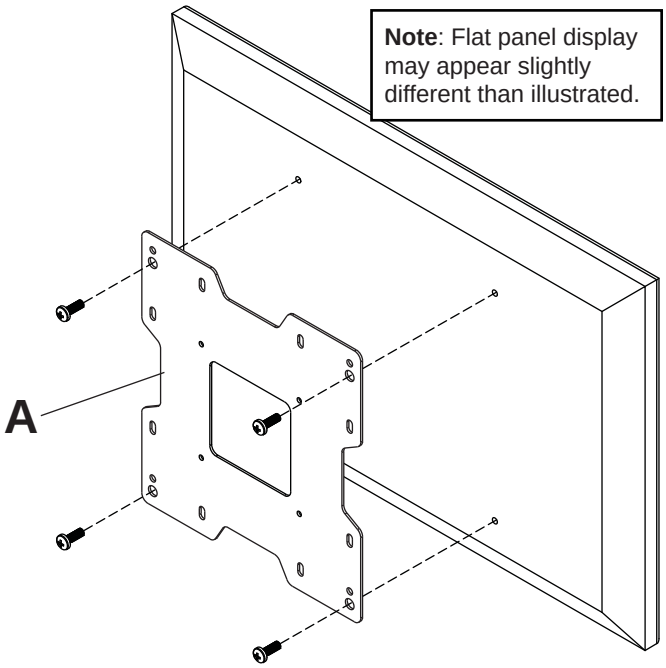

2 Thread two M5 x 6 mm screws (**H**), leaving .25" exposed thread, into top holes of adapter plate (**A**). Hook adapter plate onto mounting plate, and secure using bottom two M5 x 6 mm screws as shown in figures 2.1 and 2.2. Tighten all four screws.

Note: For security option, use M5 x 6 mm screws (**I**) in place of (**H**). Tighten security screws using allen wrench (**J**).

fig. 2.1

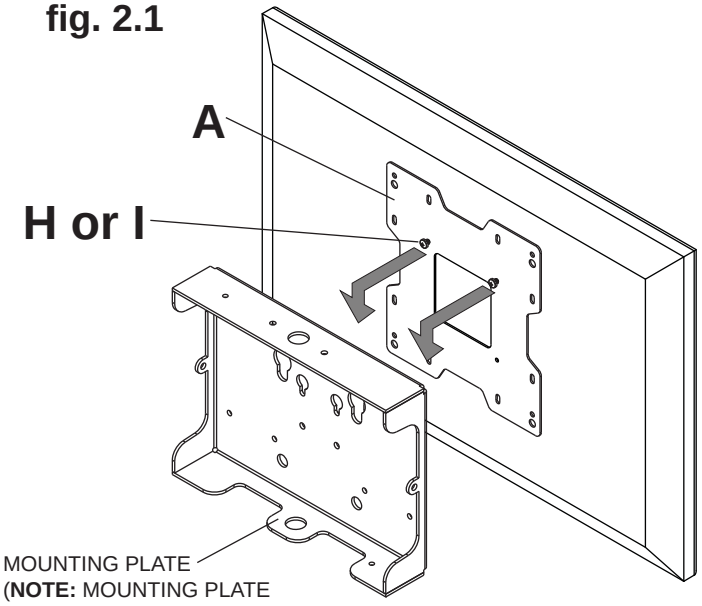

fig. 2.2

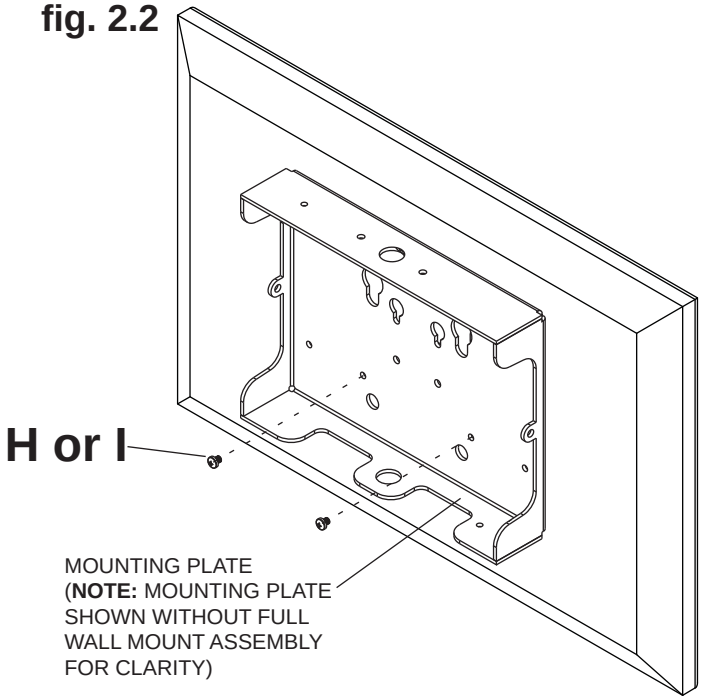

ISSUED: 10-13-05 SHEET #: 202-9039-2 08-16-11

© 2011, Peerless Industries, Inc. All rights reserved.
All other brand and product names are trademarks or registered trademarks of their respective owners.

Peerless Industries, Inc.
2300 White Oak Circle
Aurora, Il 60502
www.peerlessmounts.com